INFORMATION REGARDING THE UPCOMING SLURRY SEAL PROJECT

The City of Coronado is currently finalizing a schedule to slurry seal the streets slated for this year (see Exhibit A):

- E Avenue from First Street to Isabella Avenue,
- F Avenue from First Street to Ocean Boulevard,
- G Avenue from First Street to Tenth Street, and
- H Avenue from First Street to Olive Avenue

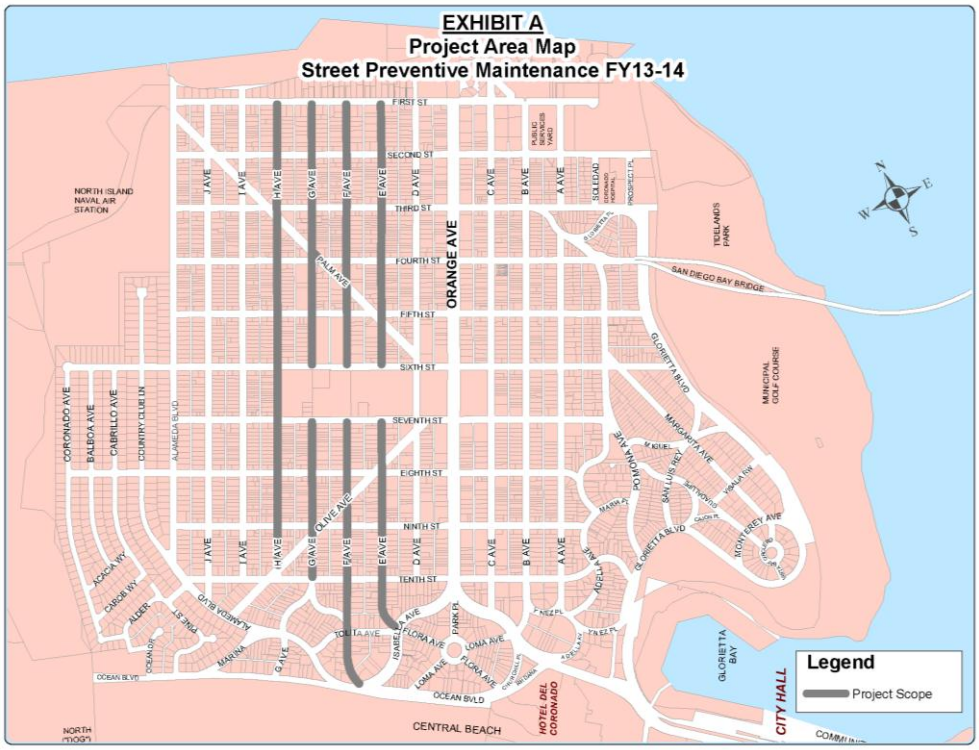

Following is some information regarding the project and the upcoming construction activity.

What is a slurry seal?

- A slurry seal is a type of seal coat composed of asphalt emulsion, fine aggregates, mineral filler, various additives, and water, all of which are mixed in the field and applied from a truck with a spreader box that spreads the slurry in a uniform layer. Coronado typically utilizes a Type I Slurry which results in a slurry layer that is 1/8" thick or less. Once applied, the slurry will fill small surface cracks, stop raveling, and improve the skid resistance of the pavement.

When will construction take place?

- An exact date is not yet known; however, we anticipate the majority of the work will occur between now and August 16, 2014.
- The contractor is required to place notifications on the doors of all properties along the affected streets a minimum of three days before any work begins. "No Parking" signs will also be posted in advance of the work.

Will there be any impacts during construction?

- Yes. There will be no parking allowed along the streets on the dates when they are designated to be slurried. However, all streets will be open at the end of the work day and once safe to do so.

Who do I contact with questions about the project?

- Tony Mendoza, Engineering Technician; (619) 522-7384; tmendoza@coronado.ca.us